UNIT PLAN SCHEDULE

UNIT 'A3' & 'A4'	A-2.15
UNIT 'B1'	A-2.16
UNIT 'B2'	A-2.17
UNIT 'C'	A-2.18
UNIT 'D1'	A-2.19
UNIT 'D2'	A-2.20
UNIT 'F1'	A-2.21
UNIT 'F2'	A-2.22
UNIT 'F3'	A-2.23
UNIT 'G'	A-2.25

LEGEND

CROSS SECTION MARKER
- SECTION IDENTIFICATION
- DIRECTION OF VIEW
- SHEET WHERE DRAWN

DETAIL REFERENCE
- DETAIL NUMBER
- SHEET WHERE DRAWN

1 HOUR FIRE SEPARATION

1 1/2 HOUR FIRE SEPARATION

W1 WALL CONSTRUCTION TYPE

A DOOR NUMBER (SEE SCHEDULE ON A-6.01)

1 WINDOW NUMBER (SEE SCHEDULE ON A-6.01)

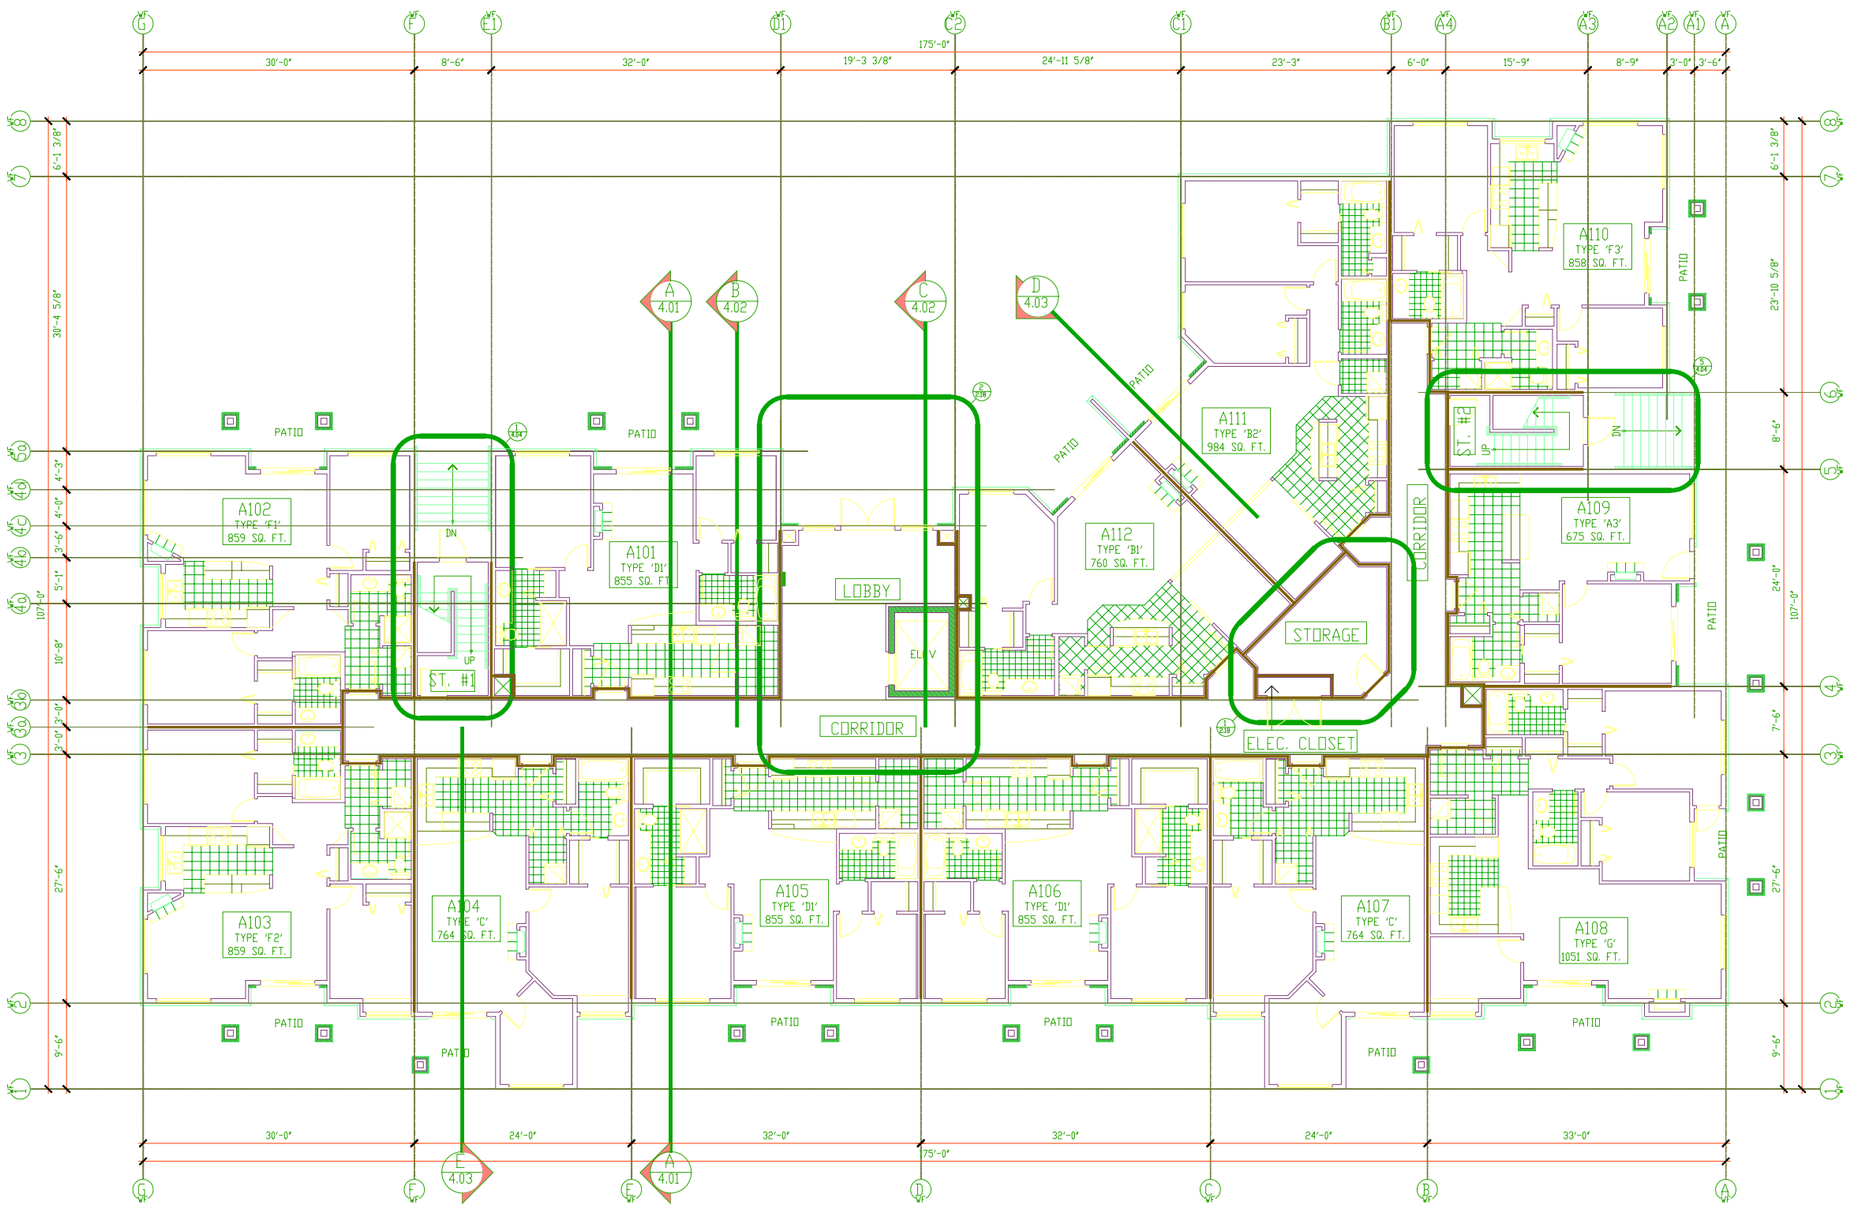

MAIN FLOOR PLAN 12,020 SQ. FT.

SCALE: 1/8" = 1'-0"

CONSTRUCTION TYPES

TYPE	PLAN	DESCRIPTION	FRR	STC
W1		INTERIOR PARTY WALL - W13a OBC.BC. 1998 APPENDIX D TABLES D-2.3.4A & D-2.3.4D 5/8" TYPE 'X' GYPSUM BOARD 1/2" PLYWOOD SHEATHING (SEE STRUCTURAL) 2x4 WOOD STUDS @ 16" O.C. 3 1/8" BATT INSULATION (OR APPROVED ALTERNATE ACOUSTIC INSULATION) 1" AIRSPACE 3 1/8" BATT INSULATION(OR APPROVED ALTERNATE ACOUSTIC INSULATION 2x4 WOOD STUDS @ 16" O.C. PLYWOOD SHEATHING(SEE STRUCTURAL 5/8" TYPE 'X' GYPSUM BOARD NOTE: NO PENETRATION ONLY AIRSPACE WIDTH OR ANY BRIDGING ACROSS THIS AIRSPACE OR BETWEEN THE STAGGERED PORTIONS OF THE WALL.	1 HR	57
W2	SUITE CORRIDOR	CORRIDOR WALL - W8a OBC.BC. 1998 APPENDIX D TABLES D-2.3.4A & D-2.3.4D 2 LAYERS 5/8" TYPE 'X' GYPSUM BOARD 2x4 WOOD STUDS STAGGERED ON 2x6 BOTTOM & TOP PLATE @ 16" O.C. 2 3/8" BATT INSULATION(OR APPROVED ALTERNATE ACOUSTIC INSULATION EACH SIDE 2x4 WOOD STUDS @ 16" O.C. 1/2" PLYWOOD SHEATHING(SEE STRUCTURAL 5/8" TYPE 'X' GYPSUM BOARD NOTE: NO BRIDGING ACROSS THIS AIRSPACE OR BETWEEN THE STAGGERED PORTIONS OF THE WALL.	1 HR	50
W3		INTERIOR WALL 1/2" GYPSUM BOARD 2x4 OR 2x6 WOOD STUDS @ 16" O.C. (SEE FLOOR PLAN) 1/2" GYPSUM BOARD		
W4		LOAD BEARING INTERIOR WALL, COLUMNS, BEAMS ETC. OBC.BC. 1998 APPENDIX D TABLES D-2.3.4A & D-2.3.4D 5/8" TYPE 'X' GYPSUM BOARD 2x4 OR 2x6 WOOD STUDS @ 16" O.C. (SEE FLOOR PLAN 5/8" TYPE 'X' GYPSUM BOARD	1 HR	
W5		EXTERIOR WALL OBC.BC. 1998 APPENDIX D TABLES D-2.3.4A & D-2.3.4D VINYL SIDING (SEE ELEVATIONS) 3/8" x 2" P.T. PLYWOOD STRAPPING @ 16" O.C. 2 LAYERS 30 MIN. BUILDING PAPER 1/2" OSB SHEATHING 2x4 OR 2x6 WOOD STUDS @ 16" O.C. (SEE FLOOR PLAN) R-14 BATT INSULATION 6 MIL. UV RATED POLY VAPOUR BARRIER 5/8" TYPE 'X' GYPSUM BOARD	1 HR	
W6		EXTERIOR WALL OBC.BC. 1998 APPENDIX D TABLES D-2.3.4A & D-2.3.4D CULTURED STONE VENEER 3/4" STUCCO C/W X-LATH 3/8" x 2" P.T. PLYWOOD STRAPPING @ 8 O.C. 2 LAYERS 30 MIN. BUILDING PAPER 1/2" OSB SHEATHING 2x4 OR 2x6 WOOD STUDS @ 16" O.C. (SEE FLOOR PLAN) R-14 BATT INSULATION 6 MIL. UV RATED POLY VAPOUR BARRIER 5/8" TYPE 'X' GYPSUM BOARD	1 HR	
W7		NOT USED		
W8		CONCRETE WALL 8" CONCRETE WALL (SEE STRUCTURAL)		
W9		FOUNDATION WALL - UNDERGROUND PARKING DELTA KEY DRAINAGE MATERIAL 8" CONCRETE WALL (SEE STRUCTURAL)		
W10		BLOCK WALL 8" CONCRETE MASONRY WALLISEE STRUCTURAL		
W11		BLOCK WALL c/w FURRING - 3M SDK 8" CONCRETE MASONRY WALLISEE STRUCTURAL 1/2" AIRSPACE R-14 BATT INSULATION(OR APPROVED ALTERNATE ACOUSTIC INSULATION 2x6 WOOD STUDS @ 16" O.C. 1/2" PLYWOOD SHEATHING(SEE STRUCTURAL 5/8" TYPE 'X' GYPSUM BOARD		55+
W12		BLOCK WALL c/w FURRING 8" CONCRETE MASONRY WALLISEE STRUCTURAL 1/2" AIRSPACE 2X4 WOOD STUDS @ 16" O.C. 1/2" PLYWOOD SHEATHING(SEE STRUCTURAL 5/8" TYPE 'X' GYPSUM BOARD		
TYPE	SECTION	DESCRIPTION	FRR	STC
F1		UNDERGROUND PARKING SLAB 3" CONCRETE SLAB (SEE STRUCTURAL) 6 MIL. UV RATED VAPOUR BARRIER (TO HEATED AREAS ONLY) MIN. 6" COMPACTED GRANULAR FILL COMPACTED TO 98% PROCTOR DENSITY		
F2		FIRST FLOOR - F3b OBC.BC. 1998 APPENDIX D TABLES D-2.2.1A & D-2.2.1D FLOOR FINISH ON UNDERLAYMENT MIN. 5" REINFORCED CONCRETE SLAB (SEE STRUCTURAL) APPROVED SPRAY-ON INSULATION (MIN. R20) TO UNDERSIDE OF SLAB	1 HR	50
F3		SECOND, THIRD & FOURTH FLOOR - (OR EQUIVALENCY - SEE REPORT PREPARED BY PIONEER CONSULTING LTD) FLOOR FINISH ON UNDERLAYMENT 1 1/2" LIGHTWEIGHT CONCRETE 5/8" T&G PLYWOOD GLUED & NAILED 2x10 FLOOR JOISTS c/w CROSS BRIDGING (SEE STRUCTURAL) R-19 BATT INSULATION (OR APPROVED ALTERNATE ACOUSTIC INSULATION) RESILIENT CHANNELS @ 16" O.C. 1 LAYER 5/8" TYPE 'C' GYPSUM BOARD	1 HR	57
F4		CORRIDOR FLOOR - (OR EQUIVALENCY - SEE REPORT PREPARED BY PIONEER CONSULTING LTD) FLOOR FINISH ON UNDERLAYMENT 1 1/2" LIGHTWEIGHT CONCRETE 5/8" T&G PLYWOOD GLUED & NAILED 2x 10 FLOOR JOISTS c/w CROSS BRIDGING (SEE STRUCTURAL) RESILIENT CHANNELS @ 16 O.C. 1 LAYER 5/8" TYPE 'C' GYPSUM BOARD	1 HR	51
F5		EXTERIOR FLOOR FLOOR FINISH ON UNDERLAYMENT 1 1/2" LIGHTWEIGHT CONCRETE 5/8" T&G PLYWOOD GLUED & NAILED 2x10 FLOOR JOISTS c/w CROSS BRIDGING (SEE STRUCTURAL) R-20 BATT INSULATION (OR APPROVED ALTERNATE ACOUSTIC INSULATION) 2 LAYERS 30 MIN. BUILDING PAPER PRE-FINISHED ALUMINUM SOFFIT		
F6		BALCONY APPROVED 60 MIL. SINGLE PLY PVC MEMBRANE 5/8" T&G PLYWOOD GLUED & NAILED 2x WOOD JOISTS (SEE STRUCTURAL) VENTED ALUMINUM SOFFIT		
F7		PATIO - F3b OBC.BC. 1998 APPENDIX D TABLES D-2.2.1A & D-2.2.1D 24"x24" CONCRETE PAVERS 42" BORD EYE GRAVEL 2 PLY TORCH DOWN SBS MODIFIED TO REARC SPECIFICATIONS MIN. 5" REINFORCED CONCRETE SLAB(SEE STRUCTURAL APPROVED SPRAYON INSULATION (MIN. R20) TO UNDERSIDE OF SLAB	2 HR	50
R1		7:12 PITCHED ROOF FIBERGLASS LAMINATEDROOF SHINGLES - CLASS A, B OR C (MIN. 30 YEAR WARRANTY 30 LBS UNDERLAYMENT 1/2" PLYWOOD SHEATHING (W/ H' CLIPS ENGINEERED WOOD TRUSSES(SEE STRUCTURAL		
R2		FLAT ROOF 2 PLY TORCH DOWN SBS MODIFIED TO REARC SPECIFICATIONS 30 LBS UNDERLAYMENT 5/8" PLYWOOD DECK GLUED & NAILED ENGINEERED WOOD TRUSSES @24" O.C.		
R3		EXPOSED SUSPENDED SLAB OVER PARKING - F3b OBC.BC. 1998 APPENDIX D TABLES D-2.2.1A & D-2.2.1D 2 PLY TORCH DOWN SBS MODIFIED (TO REARC SPECIFICATIONS MIN. 5" REINFORCED CONCRETE SLAB (SEE STRUCTURAL) NOTE: SEE SITE PLAN & SECTIONS FOR AREAS TO RECEIVE ASPHALT, CONCRETE OR LANDSCAPING OVER.	2 HR	50
C1		FOURTH FLOOR CEILING OBC.BC. 1998 APPENDIX D TABLES D-2.3.4A) R-40 BATT INSULATION 6 MIL. UV RATED VAPOUR BARRIER 2 LAYERS 5/8" TYPE 'X' GYPSUM BOARD	1 HR	
C2		CORRIDOR CEILING 2x4 FRAMING @ 16" O.C. 1 LAYER 1/2" GYPSUM BOARD		
S1		INTERIOR STAIR - UNIT MIN. 4 15/16" & MAX. 7 7/16" RISERS 10" TREADS 1" PLYWOOD TREAD c/w 1" NOSING (ROUNDED) 7" RAKEBACK 1/2" PLYWOOD RISER 3 - 2x12 STRINGERS		
S2		EXTERIOR STAIR - CONCRETE CONCRETE STAIR c/w 1/2" RADIUS NOSING (SEE STRUCTURAL) MIN. 4 15/16" & MAX. 7 1/16" RISERS 12" TREADS 7" RAKEBACK MIN. 5" GRANULAR FILL		

General Notes

No.	Revision/Issue	Date

Firm Name and Address

ZOZO GRAPHICS and DESIGN

31755 Thornhill Place
Abbotsford, BC V2T 6Y3

(604) 855-8317

Project Name and Address

48 UNIT APARTMENTS HAMPTON HEIGHTS

IBS DEVELOPMENT CORPORATION

12345 95th Avenue
Nowhere, BC

Project: 0404

Sheet:

Date: AUGUST 6, 2004

Scale: AS NOTED