UNIT PLAN SCHEDULE

UNIT 'A3' & 'A4'	A-2.15
UNIT 'B1'	A-2.16
UNIT 'B2'	A-2.17
UNIT 'C'	A-2.18
UNIT 'D1'	A-2.19
UNIT 'D2'	A-2.20
UNIT 'F1'	A-2.21
UNIT 'F2'	A-2.22
UNIT 'F3'	A-2.23
UNIT 'G'	A-2.25

LEGEND

CROSS SECTION MARKER
SECTION IDENTIFICATION
DIRECTION OF VIEW
SHEET WHERE DRAWN

DETAIL REFERENCE
DETAIL NUMBER
SHEET WHERE DRAWN

1 HOUR FIRE SEPARATION

1 1/2 HOUR FIRE SEPARATION

W1 WALL CONSTRUCTION TYPE

A DOOR NUMBER (SEE SCHEDULE ON A-6.01)

1 WINDOW NUMBER (SEE SCHEDULE ON A-6.01)

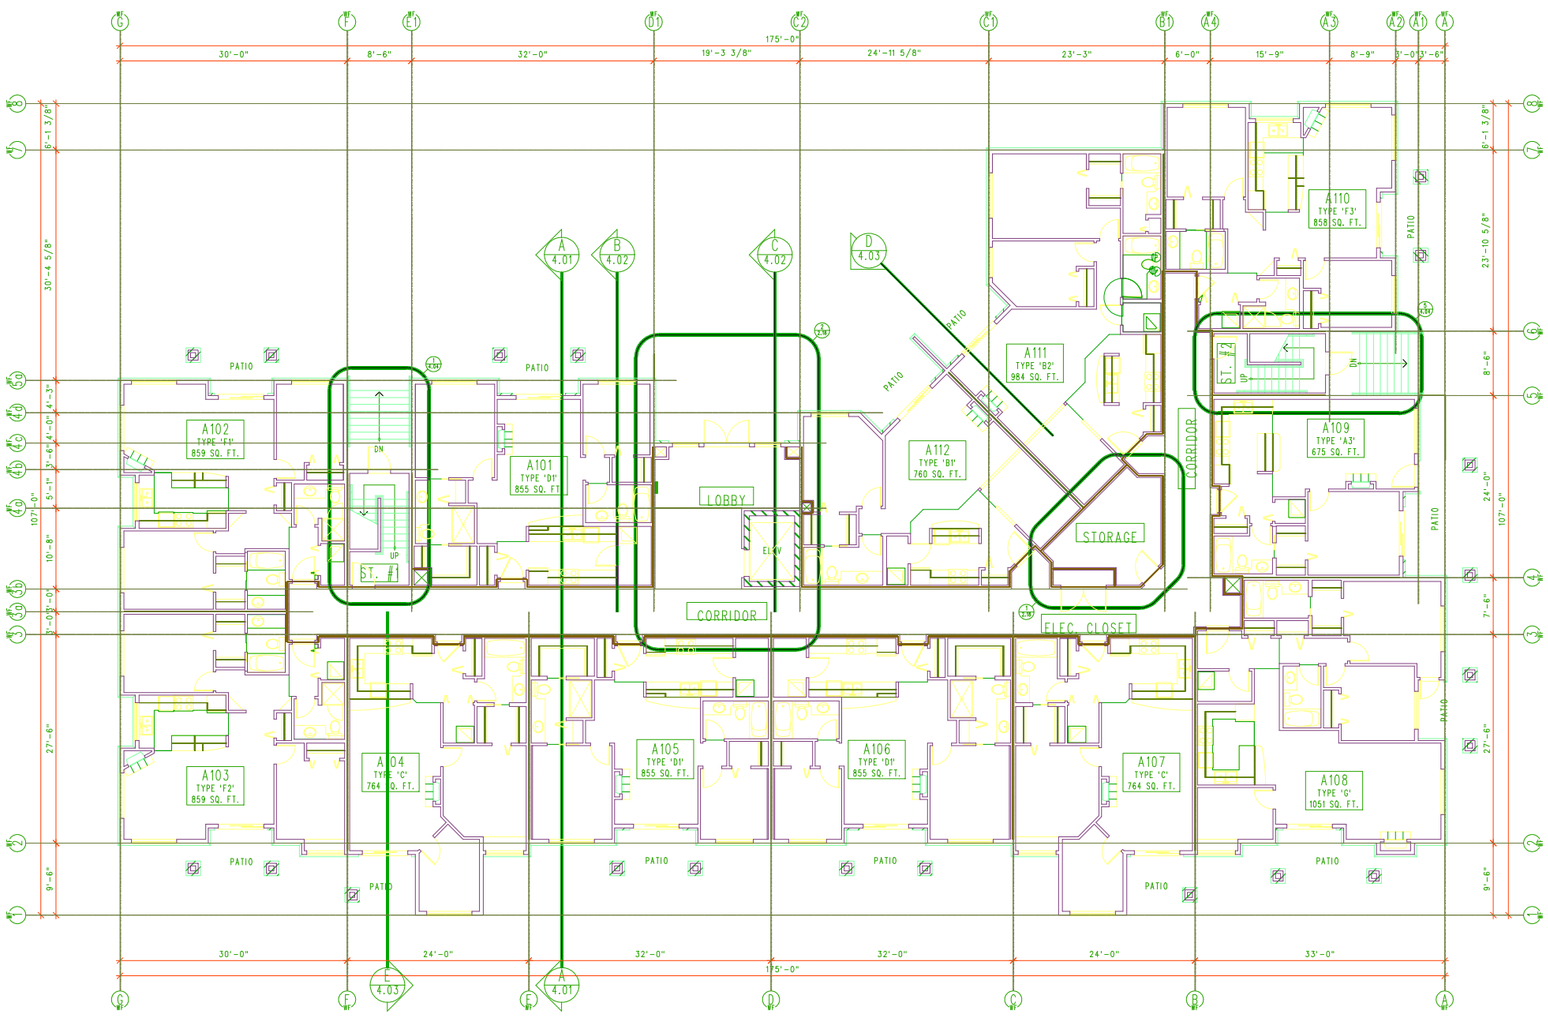

MAIN FLOOR PLAN 12,020 SQ. FT.
SCALE: 1/8" = 1'-0"

CONSTRUCTION TYPES

TYPE	PLAN	DESCRIPTION	FRR	STC
W7		INTERIOR PARTY WALL - 90mm (B.C.B.C. 1998 APPENDIX D TABLES D-3.3.4.A & D-3.3.4.C) 5/8" TYPE 'X' GYPSUM BOARD 1/2" PLYWOOD SHEATHING (SEE STRUCTURAL) 2x4 WOOD STUDS @ 16" O.C. 3" BATT INSULATION (OR APPROVED ALTERNATE ACOUSTIC INSULATION) 1" AIRSPACE 3 5/8" BATT INSULATION(OR APPROVED ALTERNATE ACOUSTIC INSULATION) 2x4 WOOD STUDS @ 16" O.C. PLYWOOD SHEATHING (SEE STRUCTURAL) 5/8" TYPE 'X' GYPSUM BOARD NOTE: THE SECTION OF 1" AIRSPACE WIDTH OR ANY BRIDGING ACROSS THIS AIRSPACE OR BETWEEN THE STAGGERED PORTIONS OF THE WALL.	1 HR	57
W7	SUITE / CORRIDOR	CORRIDOR WALL - 90mm (B.C.B.C. 1998 APPENDIX D TABLES D-3.3.4.A & D-3.3.4.C) 2 LAYERS 5/8" TYPE 'X' GYPSUM BOARD 2x4 WOOD STUDS STAGGERED ON 2x4 BOTTOM & TOP PLATE @ 16" O.C. 3 5/8" BATT INSULATION(OR APPROVED ALTERNATE ACOUSTIC INSULATION)EACH SIDE 2x4 WOOD STUDS @ 16" O.C. 1/2" PLYWOOD SHEATHING(SEE STRUCTURAL) 5/8" TYPE 'X' GYPSUM BOARD SOUNDBLOCKING ACROSS THIS AIRSPACE OR BETWEEN THE STAGGERED PORTIONS OF THE WALL.	1 HR	62
W7		INTERIOR WALL 5/8" GYPSUM BOARD 2x4 OR 2x6 WOOD STUDS @ 16" O.C. (SEE FLOOR PLAN) 5/8" GYPSUM BOARD		
W7		LOAD BEARING INTERIOR WALL, COLUMNS, BEAMS ETC. (B.C.B.C. 1998 APPENDIX D TABLES D-3.3.4.A & D-3.3.4.C) 5/8" TYPE 'X' GYPSUM BOARD 2x4 OR 2x6 WOOD STUDS @ 16" O.C. (SEE FLOOR PLAN) 5/8" TYPE 'X' GYPSUM BOARD	1 HR	
W7		EXTERIOR WALL (B.C.B.C. 1998 APPENDIX D TABLES D-3.3.4.A & D-3.3.4.C) VINYL SIDING (SEE ELEVATIONS) 3/8" x 2" P.T. PLYWOOD STRAPPING @ 16" O.C. 2 LAYERS 30 MIN. BUILDING PAPER PLYWOOD SHEATHING 3x4" OR 2x6 WOOD STUDS @ 16" O.C. (SEE FLOOR PLAN) R-14 BATT INSULATION 4 MIL. UV RATED POLY VAPOUR BARRIER 5/8" TYPE 'X' GYPSUM BOARD	1 HR	
W7		EXTERIOR WALL (B.C.B.C. 1998 APPENDIX D TABLES D-3.3.4.A & D-3.3.4.C) CALIFORNIA STUCCO VENEER 3/4" STUCCO C/W R-LATH 3/8" x 2" P.T. PLYWOOD STRAPPING @ 16" O.C. 2 LAYERS 30 MIN. BUILDING PAPER PLYWOOD SHEATHING 3x4" OR 2x6 WOOD STUDS @ 16" O.C. (SEE FLOOR PLAN) R-14 BATT INSULATION 4 MIL. UV RATED POLY VAPOUR BARRIER 5/8" TYPE 'X' GYPSUM BOARD	1 HR	
W7		NOT USED		
W7		CONCRETE WALL 8" CONCRETE WALL (SEE STRUCTURAL)		
W7		FOUNDATION WALL - UNDERGROUND PARKING "DELTA MP" DRAINAGE MATERIAL 8" CONCRETE WALL (SEE STRUCTURAL)		
W7		BLOCK WALL 8" CONCRETE MASONRY WALL (SEE STRUCTURAL)		
W7		BLOCK WALL c/w FURRING - NO SOR. 8" CONCRETE MASONRY WALL (SEE STRUCTURAL) 1/2" AIRSPACE R-8 BATT INSULATION(OR APPROVED ALTERNATE ACOUSTIC INSULATION) 2x4 WOOD STUDS @ 16" O.C. 1/2" PLYWOOD SHEATHING (SEE STRUCTURAL) 5/8" TYPE 'X' GYPSUM BOARD	3hr	
W7		BLOCK WALL c/w FURRING 8" CONCRETE MASONRY WALL (SEE STRUCTURAL) 1/2" AIRSPACE 2x4 WOOD STUDS @ 16" O.C. 1/2" PLYWOOD SHEATHING (SEE STRUCTURAL) 5/8" TYPE 'X' GYPSUM BOARD		

TYPE	SECTION	DESCRIPTION	FRR	STC
F7		UNDERGROUND PARKING SLAB 8" CONCRETE SLAB (SEE STRUCTURAL) 4 MIL. UV RATED VAPOUR BARRIER (TO HEATED AREAS ONLY) MIN. 6" COMPACTED GRANULAR FILL COMPACTED TO MODIFIED PROCTOR DENSITY		
F7		FIRST FLOOR - FTG (B.C.B.C. 1998 APPENDIX D TABLES D-3.3.4.A & D-3.3.4.B) FLOOR FINISH ON MODIFICATION MIN. 6" REINFORCED CONCRETE SLAB (SEE STRUCTURAL) APPROVED SPRAY-ON INSULATION (MIN. RSI) TO UNDERSIDE OF SLAB	1 HR	52
F7		SECOND, THIRD & FOURTH FLOOR - DRY ENVIRONMENT - SEE REPORT PREPARED BY PIONEER CONSULTING LTD. FLOOR FINISH ON MODIFICATION 1 1/2" LIGHTWEIGHT CONCRETE 5/8" T&G PLYWOOD (GLUED & NAILED) 2x10 FLOOR JOISTS c/w CROSS BRIDGING (SEE STRUCTURAL) R-8 BATT INSULATION (OR APPROVED ALTERNATE ACOUSTIC INSULATION) RESILIENT CHANNELS @ 16" O.C. 1 LAYER 5/8" TYPE 'X' GYPSUM BOARD	1 HR	57
F7		CORRIDOR FLOOR - DRY ENVIRONMENT - SEE REPORT PREPARED BY PIONEER CONSULTING LTD. FLOOR FINISH ON MODIFICATION 1 1/2" LIGHTWEIGHT CONCRETE 5/8" T&G PLYWOOD (GLUED & NAILED) 2x10 FLOOR JOISTS c/w CROSS BRIDGING (SEE STRUCTURAL) RESILIENT CHANNELS @ 16" O.C. 1 LAYER 5/8" TYPE 'X' GYPSUM BOARD	1 HR	51
F7		EXTERIOR FLOOR FLOOR FINISH ON MODIFICATION 1 1/2" LIGHTWEIGHT CONCRETE 5/8" T&G PLYWOOD (GLUED & NAILED) 2x10 FLOOR JOISTS c/w CROSS BRIDGING (SEE STRUCTURAL) R-20 BATT INSULATION (OR APPROVED ALTERNATE ACOUSTIC INSULATION) 2 LAYERS 30 MIN. BUILDING PAPER PREFINISHED ALUMINUM SOFFIT		
F7		BALCONY APPROVED 60 MIL. SINGLE PLY PVC MEMBRANE 5/8" T&G PLYWOOD (GLUED & NAILED) 2x BEAM JOISTS (SEE STRUCTURAL) VENTED ALUMINUM SOFFIT		
F7		PATIO - FTG (B.C.B.C. 1998 APPENDIX D TABLES D-3.3.4.A & D-3.3.4.B) 24"x24" CONCRETE PAVERS 2" SAND CFC GRAVEL 2 PLY TORCH DOWN SBS ROOFING (TO HEARC SPECIFICATIONS) MIN. 5" REINFORCED CONCRETE SLAB (SEE STRUCTURAL) APPROVED SPRAY-ON INSULATION (MIN. RSI) TO UNDERSIDE OF SLAB	2 HR	52
R7		3:12 PITCHED ROOF FIBERGLASS LAMINATE/ROOF SHINGLES - CLASS A, B OR C (MIN. 30 -YEAR WARRANTY) 30 LB. FELT UNDERLAYMENT R-20 BATT INSULATION(SEE C/R 'V' CLIPS ENGINEERED WOOD TRUSSES (SEE STRUCTURAL)		
R7		FLAT ROOF 2 PLY TORCH DOWN SBS ROOFING (TO HEARC SPECIFICATIONS) 30 LBS UNDERLAYMENT 5/8" PLYWOOD DECK (GLUED & NAILED) ENGINEERED WOOD TRUSSES @ 24" O.C.		
R7		EXPOSED SUSPENDED SLAB OVER PARKING - FTG (B.C.B.C. 1998 APPENDIX D TABLES D-3.3.4.A & D-3.3.4.B) 2 PLY TORCH DOWN SBS ROOFING (TO HEARC SPECIFICATIONS) MIN. 5" REINFORCED CONCRETE SLAB (SEE STRUCTURAL) APPROVED SPRAY-ON INSULATION (MIN. RSI) TO ROOF	2 HR	52
R7		FINISH FLOOR CEILING (B.C.B.C. 1998 APPENDIX D TABLES D-3.3.4.A) R-40 BATT INSULATION 4 MIL. UV RATED VAPOUR BARRIER 1 LAYER 5/8" TYPE 'X' GYPSUM BOARD	1 HR	
R7		CORRIDOR CEILING 2x4 FRAMING @ 16" O.C. 1 LAYER 5/8" GYPSUM BOARD		
S7		INTERIOR STAIR - WOOD MIN. 4 RISER @ MIN. 7 1/8" RISERS 10" TREADS 1" PLYWOOD TREAD c/w 1" NOSING (HARDWOOD) 1" HARDWOOD 5/8" PLYWOOD RISER 2 - 2x12 STRINGERS		
S7		EXTERIOR STAIR - CONCRETE CONCRETE STAIR c/w 1/2" NOSING MOUNT (SEE STRUCTURAL) MIN. 4 RISER @ MIN. 7 1/8" RISERS 12" TREADS 1" HARDWOOD MIN. 5" GRANULAR FILL		

General Notes

No.	Revision/Issue	Date

Firm Name and Address
ZOZO GRAPHICS and DESIGN
31755 Thornhill Place
Abbotsford, BC V2T 6Y3
(604) 855-8317

Project Name and Address
48 UNIT APARTMENTS
HAMPTON HEIGHTS

12345 95th Avenue
Nowhere, BC

IBS DEVELOPMENT CORPORATION

Project	Sheet
0404	
Date: AUGUST 6, 2004	
Scale: AS NOTED	